

MV-SC5020XC

2 MP Color Smart Camera

MV-SC5020XC smart camera is developed based on high-performance embedded platform with strong calculation performance. It integrates VM functions and AI deep learning algorithm, and can use more than 140 algorithms. It adopts multiple interfaces for supporting display, keyboard, mouse, etc.



Key Features

- Adopts AI deep learning algorithm to achieve OCR, object recognition, defect detection, etc.
- Integrates VM functions, and supports more than 140 algorithms.
- Adopts multiple I/O interfaces, such as multiple input/output signals.
- Supports multiple communication protocols.
- Supports indicators displaying device status for easy debugging and maintenance.
- Supports ingress protection IP67.

Available Models

- 6 mm focal length smart camera: MV-SC5020XC-06M-WBN
- 12 mm focal length smart camera: MV-SC5020XC-12M-WBN
- 16 mm focal length smart camera: MV-SC5020XC-16M-WBN

Typical Application

- Consumer electronics
- Food and pharmaceutical
- Packaging




Specification

Model	MV-SC5020XC-06M-WBN	MV-SC5020XC-12M-WBN	MV-SC5020XC-16M-WBN
Tool			
Function module	Vision Master Platform (include deep learning module)		
Communication protocol	TCP, UDP, Modbus, Serial Port, PROFINET, EtherNet/IP, Fins, MC, FTP, etc.		
Camera			
Sensor type	CMOS, global shutter		
Pixel size	3.45 μm × 3.45 μm		
Sensor size	1/2.53"		
Resolution	1600 × 1216		
Max. frame rate	100 fps		
Gain	0 dB to 37 dB		
Exposure time	15 μs to 1 sec		
Pixel format	Mono 8, RGB 8		
Mono/color	Color		
Platform			
Memory	8 GB		
Storage	64 GB		
Electrical feature			
Data interface	Gigabit Ethernet (1000 Mbit/s)		
Digital I/O	12-pin M12 connector provides power and I/O, including opto-isolated input × 3 (Line 0/1/2), opto-isolated output × 3 (Line 3/4/5), and RS-232 × 1		
Power supply	24 VDC		
Power consumption	Avg. 12.3 W @ 24 VDC (with included light source on) Max. 48 W @ 24 VDC (with included light source on)		
Mechanical			
Lens mount	M12-mount, mechanical focus		
Focal length	6 mm	12 mm	16 mm
Lens cap	Half polarization lens cap by default. Transparent or full polarization lens cap is optional.		
Light source	White light source by default. Red, blue, or IR light source is optional		
Indicator	Power indicator (PWR), network indicator (LNK), and user-defined indicator (U1/U2)		
Dimension	Straight angle: 112.3 mm × 54 mm × 60.2 mm (4.4" × 2.1" × 2.4") Right angle: 88.7 mm × 54 mm × 82.5 mm (3.5" × 2.1" × 3.2")		
Weight	Approx. 370 g (0.8 lb.)		
Ingress protection	IP67 (under proper installation of waterproof lens cap)		
Temperature	Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: −30 °C to 70 °C (−22 °F to 158 °F)		
Humidity	20% RH to 95% RH (no condensation)		
Vibration resistance	Meets standard IEC 60068-2-6:2007. Device only (without installation bracket): 10 Hz to 55 Hz, 1.5 mm peak-to-peak amplitude, 2 hours per axis (X, Y, Z)		


Shock resistance	Meets standard IEC 60068-2-27:2008. Device only (without installation bracket): 30 g / 11 ms, half-sine wave, 500 shocks per axis (6 directions)
Additional information	
Certification	CE, KC

Dimension


Device (Straight Angle):

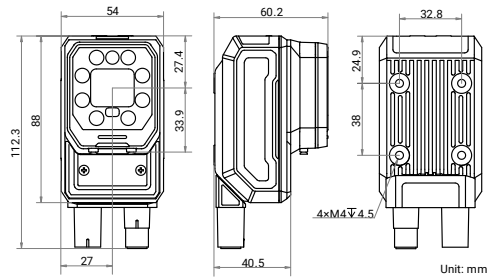


Device (Right Angle):

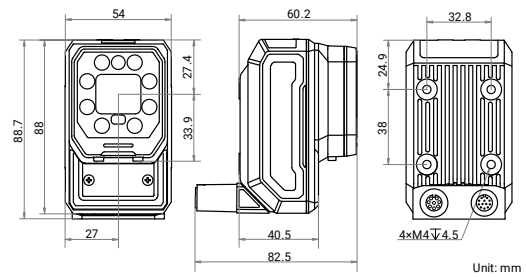


Device and Installation Bracket (Straight Angle):

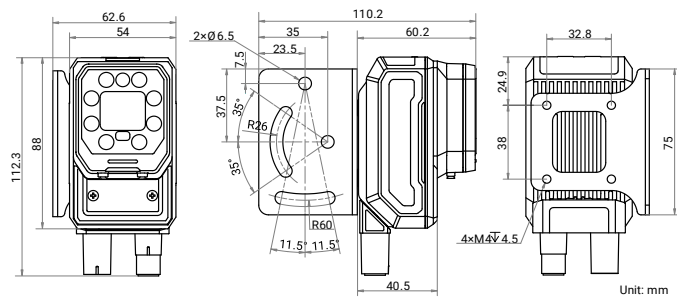




Device and Installation Bracket (Right Angle):

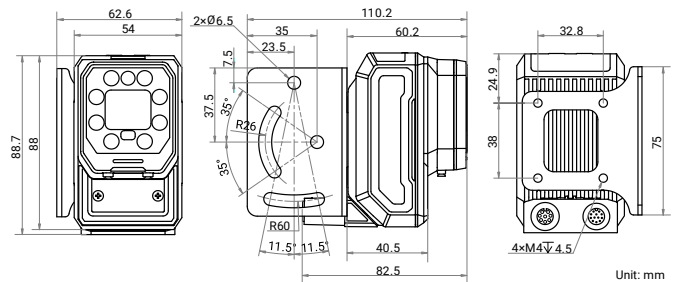

Installation Bracket:



Detection Range

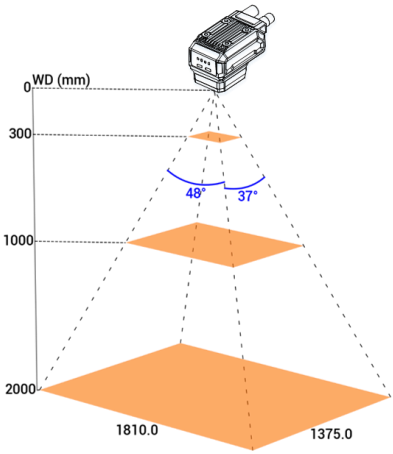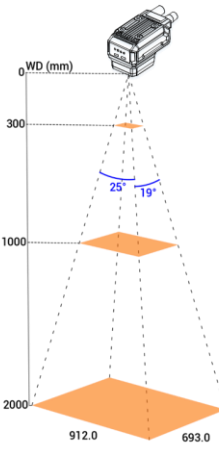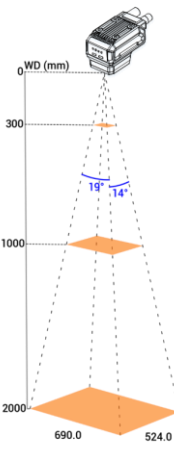MV-SC5020XC-06/12/16M-WBN (Unit: mm)					
Lens Focal Length	Working Distance	Field of View		Single Pixel Accuracy	Field of View Diagram
		H	V		
6	25	23	17	0.01	
	100	90	69	0.06	
	200	181	138	0.11	
	300	271	206	0.17	
	500	452	344	0.28	
	1000	905	688	0.57	
	2000	1810	1375	1.13	
12	60	27	21	0.02	
	100	46	35	0.03	
	200	91	69	0.06	
	300	137	104	0.09	
	500	228	173	0.14	
	1000	456	347	0.29	
	2000	912	693	0.57	
6	100	35	26	0.02	
	200	69	52	0.04	
	300	104	79	0.06	
	400	138	105	0.09	
	500	173	131	0.11	
	1000	345	262	0.22	
	2000	690	524	0.43	