

MV-DP3580-03P

3D Laser Profile Sensor



Introduction

With built-in high-accuracy algorithm, image process algorithm of wide dynamic range and data integration algorithm, MV-DP3580-03P can output high accurate 3D point cloud data in real time by combining high frame rate chip and accurate laser control. With compact structure, high integration and easy operation, it is widely applied into 3C industry, electronic manufacturing, automobile industry, etc.


Available Model

MV-DP3580-03P

Applicable Industry

3C industry, electronics, automobile industry, etc.


Dimension

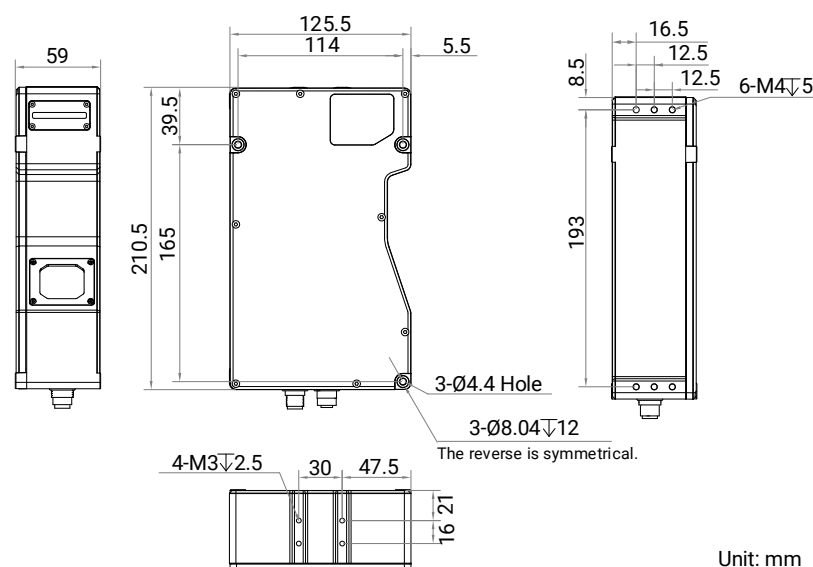

Key Feature

- Built-in high-accuracy algorithm and accuracy is up to submicron level.
- Adopts high frame rate chip with 19 KHz scan frequency.
- Supports multiple exposure modes with good robustness.
- Adopts multiple-frame integration technology to provide complete contours.
- Provides multiple filter modes with stable data.
- Supports ROI selection and auto setting for easier operation.

Measurement Range Diagram

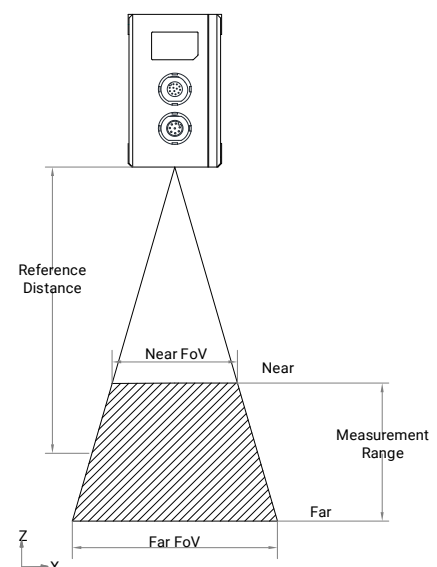

Specification

Parameter	Model	MV-DP3580-03P
	3D Laser Profile Sensor	
Performance		
Data points/profile	3200	
Reference distance	585 mm	
Measurement range (Z-axis)	580 mm	
Measurement range (X-axis)	165 mm @ near field of view 306 mm @ reference distance 447 mm @ far field of view	
Resolution (Z-axis)	12.07 μm to 102.94 μm	
Repeatability (Z-axis)*	4.47 μm @ data that sensor tests gauge block on optical platform	
Linearity Z-axis (±% of MR)	0.01	
Profile data interval	50.1 μm to 146.8 μm	
Scan frame rate	1.3 kHz (within max. measurement range), max. 19 kHz (in ROI mode)	
Data output	Depth image, profile data, brightness image	
Trigger mode	Software trigger, hardware trigger (differential encoder)	
Laser safety class	Class 3R	
Wavelength	650 nm	
Electrical features		
Data interface	Gigabit Ethernet (1000 Mbit/s), compatible with Fast Ethernet (100 Mbit/s)	
Digital I/O	12-pin M12 interface provides power and I/O, including differential input × 3 (Line 0/3/6), differential output × 1 (Line 1), and RS-232 × 1	
Power supply	24 VDC	
Power consumption	13.8 W @ 24 VDC	
Mechanical		
Dimension	210.5 mm × 125.5 mm × 59 mm (8.3" × 4.9" × 2.3")	
Weight	Approx. 1550 g (3.4 lb.)	
Ingress protection	IP67	
Temperature	Working temperature: 0 °C to 45 °C (32 °F to 113 °F) Storage temperature: −30 °C to 80 °C (−22 °F to 176 °F)	
Humidity	20% RH to 85% RH (no condensation)	
General		
Client software	3DMVS, VM3D, and third-party 3D software	
Operating system	32/64-bit Windows 7/10/11 (8 GB memory and i5 CPU recommended)	

*This data is obtained via testing gauge blocks in a laboratory, and it is an average from 4096 tests.